



**KERCHAN**  
Professional Innovation

# Product Specification

Product No: KERSAD2022042

Product model: SAD5001KA





File No: KER2022001

Version No: V2.0

Date: 2022-01-01

# Index

---

<b>01</b>	 Product Features .....	2
<b>02</b>	 Application .....	2
<b>03</b>	 Specification .....	3-4
<b>04</b>	 Instructions and After-Sales Service .....	4

## Product Features


1. Auto power on / off at a scheduled time;
2. Full HD and touch;
3. Wireless WiFi or 4G;
4. CMS Real Time Update;
5. 178/178 full view angle;
6. Support 1920\*1080p video;
7. 3rd party APP pre-installed;
8. Flexible and tailored solutions;
9. Open frame design for pop display;
10. Integrated Android 6.0/8.1/11.0 rooted Solution;
11. Optional sizes from 7" to 50" are available;
12. With CE FCC ROHS certification;

## Application

49 inch Android based Interactive LCD advertising display is a great way to advertise your product or service in retail P.O.P. or P.O.S environments by displaying with your custom videos to boost your sales and bring a better shopping experience for your customers, which is widely used in retail stores, restaurants, bank, supermarket, airport, hospital and any commercial and public in-store environment.

## Specification

### 49 inch Android Based Open Frame Video Screen

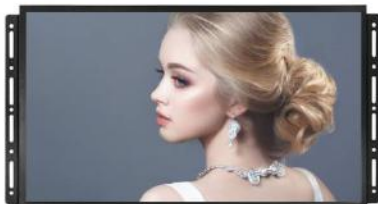

#### Description

- Model No.: SAD5001KA.
- Android based, support 3<sup>rd</sup> party APK, to install via USB/SD card.
- Open frame design which makes it more easy to integrate into POP display.
- With WiFi and Internet.



### Product Technical Specification

<b>Model</b>	SAD5001KA	<b>Shell color</b>	Standard: black
<b>Open Frame or Enclosed</b>	Open Frame	<b>External Port</b>	Support SD/U flash disk
<b>LCD Panel</b>	49 inch	<b>Input</b>	AC 100-240V
<b>Resolution</b>	1920*1080	<b>Output</b>	DC 12V/4.5A
<b>Display Ratio</b>	16:9	<b>Power consumption (Watt)</b>	≤40W
<b>Brightness</b>	300cd/m2	<b>Standby (Watt)</b>	≤1W
<b>Contrast</b>	1000:1	<b>Material</b>	SPCC material
<b>Colour</b>	16.7M	<b>Installation</b>	200*400mm VESA Wall Mount
<b>Visible Angle</b>	178/178	<b>Image Format</b>	JPEG/BMP/GIF/PNG
<b>Response Time</b>	5ms	<b>Life Time (hrs)</b>	>50000 H
<b>Audio Format</b>	MP3/ WMA/WAV	<b>Video Format</b>	MPEG1/MPEG2/MP4, AV/MOV/3GP/RMVP/MKV
<b>Visible Area</b>	1078.38*608.6mm	<b>Control Method</b>	Remote control/Mouse
<b>Outline dimension</b>	1161.7*638*64mm	<b>Default Language</b>	English
<b>CPU</b>	RK3568-Four Core-2.0Hz	<b>Menu Language</b>	Support Chinese, English
<b>OS</b>	Android 11.0	<b>Memory (RAM)</b>	2GB
		<b>ROM NAND flash</b>	16GB
<b>Storage Temperature</b>	0℃~40℃	<b>Working Temperature</b>	-20℃~60℃
<b>Working Humidity</b>	20%-80%RH	<b>Storage Humidity</b>	10%-75%
<b>Decoded Resolution</b>	Support 1080P	<b>RTC Real-time Clock</b>	Support
<b>Product Weight (N.W.)</b>	38kg	<b>Switch Time Setting</b>	Support
<b>System Update</b>	SD card update	<b>Plug Types</b>	US, EU, AU, UK Optional
<b>Package Size</b>	A single package: 1252*176*808mm	<b>Packaging</b>	1pcs/Package Package Weight: 41kg (Reference Only)
<b>External Interface</b>	DC IN/USB*2/HDMI OUT/SD/Earphone	<b>Speaker</b>	Size: 45MM*100MM, speakers 8R 5W*2



<b>Touch Panel</b>	Support	<b>External Port</b>	Support SD/U flash disk
<b>Accessories</b>	User Guide, Instruction Book, Warranty, Desiccant	<b>Optional</b>	1. Motion Sensor 2.Touch screen 3.4G module

**Accessories:** instruction manual, warranty card, desiccant, certificate, power adapter;

**Notes:** Some of the above specifications are optional for reference only. Please select the relevant function parameters according to your need and confirm the parameters with our sales team. The final interpretation right belongs to Shenzhen Kerchan Technology Co., Ltd. A corresponding fee will be charged according to the optional function, so please confirm with us.

## Instructions and After-Sales Service

### Instructions

1. The working voltage: 100V 240V ~ 50/60Hz AC, please do not exceed the working voltage range.
2. Please place gently and do not stress when shipping and storing.

### Warranty and After-Sales Service

1. Please read carefully the product specifications firstly .
2. Before using, please confirm the product not been damaged in the transport, if damaged, it cannot be installed.
3. The power supply in the package is only used for this product; Do not use other power source.
4. When the product is faulty, please entrust the professional person to carry out inspection and maintenance to ensure the safety. Do not disassemble by yourself to avoid unnecessary damage.
5. To prevent to be suffocated to death, package materials should be stay away from children.
6. To prevent to be swallowed by children, please take care of the small components.
7. Do not cover anything on the product.
8. Products should be away from the strong magnetic field interference and high temperature objects.